


Holophane External Lighting Application Guide

Muralux

Sign

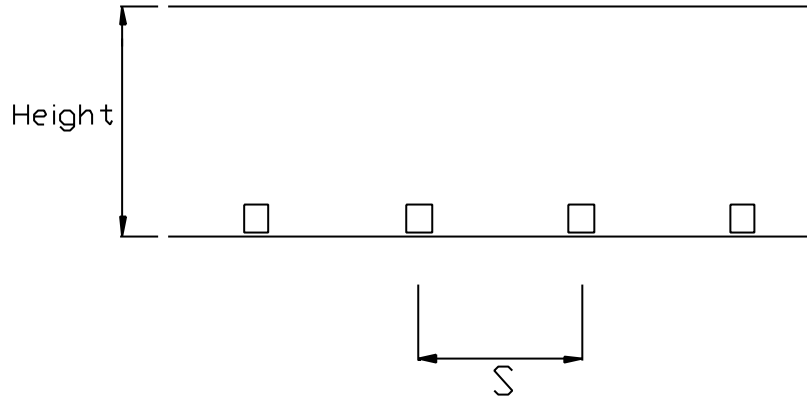

| Holophane External Lighting Application Guide | | | | | |
|--|-------------|------------------|------------------------|-------------|------------------|
| Selection Data | | | Design Solution | | |
| | Area | Height(m) | Lamp Type | S(m) | Cat No |
| White Light | Sign | 3 | 70w HTT4 | 5.0 | MUR70HTT4.WW.5S |
| | Sign | 5 | 150w HTT4 | 7.0 | MUR150HTT4.WW.5S |
| | Sign | 7 | 150w HTT4 | 5.0 | MUR150HTT4.WW.5S |
| High Pressure Sodium | Sign | 3 | 70w STT | 5.0 | MUR70STT.WW.5S |
| | Sign | 5 | 150w STT | 9.0 | MUR150STT.WW.5S |
| | Sign | 7 | 150w STT | 7.0 | MUR150STT.WW.5S |

Design Constants

Illuminance 100 Lux average

Setback 0.5m

Design at 2000 hour burn