


Holophane External Lighting Application Guide

Seattle

Service Yard

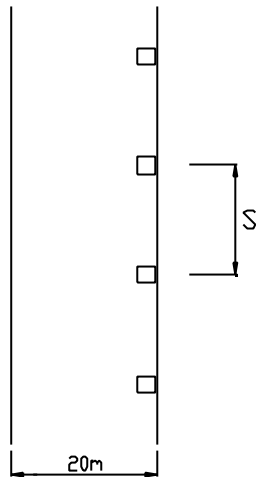

Holophane External Lighting Application Guide						
Selection Data			Design Solution			
	Area	Height(m)	Lamp Type	Tilt	S(m)	Cat No
White Light	Service Yard	10	400w HTEP	10 Deg	18.0	SLF400HTEP.AY
	Service Yard	8	400w HTEP	20 Deg	17.0	SLF400HTEP.AY
	Service Yard	6	250w HTEP	20 Deg	12.0	SLF250HTEP.AY
High Pressure Sodium	Service Yard	10	400w HPS	10 Deg	25.0	SLF400XT.AY
	Service Yard	8	400w HPS	20 Deg	22.0	SLF400XT.AY
	Service Yard	6	250w HPS	20 Deg	17.0	SLF250XT.AY

Design Constants

Illuminance 50 lux average

Design at 2000 hour burn