


Holophane External Lighting Application Guide

Wallpack

Building Perimeter

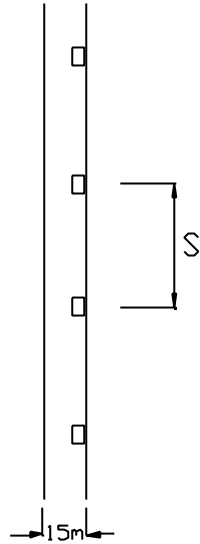

| Holophane External Lighting Application Guide | | | | | |
|--|----------------|------------------|------------------------|-------------|---------------|
| Selection Data | | | Design Solution | | |
| | Area | Height(m) | Lamp Type | S(m) | Cat No |
| Metal halide | Perimeter Path | 8 | 250w MH | 20.0 | WAL250HD |
| | Perimeter Path | 6 | 250w MH | 22.0 | WAL250HD |
| | Perimeter Path | 4 | 175w MV | 21.0 | WAL175MV |
| High Pressure Sodium | Perimeter Path | 8 | 250w HPS | 35.0 | WAL250XT |
| | Perimeter Path | 6 | 150w HPS | 25.0 | WAL150XT |
| | Perimeter Path | 4 | 100w HPS | 19.0 | WAL100XT |

Design Constants

Illuminance 20 lux average 5 lux min

Design at 2000 hour burn